


# Product Specifications

## FlashLink Mini Electronic Time-Temperature Indicator

Measurement Range	-40°F to 122°F (-40°C to 50°C)
Temperature Threshold	41°F (5°C)
Temperature Accuracy	±1.0°F/0.5°C
Single Event Alarm	Accumulated temperature abuse of 4 hours above 41°F /5°C
LED Indicators	Flashing Green: Active, no alarm Flashing Red: Alarm triggered
Battery	Coin Cell Lithium Battery
Dimensions	2.68" L x 1.27" W x 0.45" H (68.07mm L x 32.25mm W x 11.43mm H)
Casing	ABS plastic
Weight	0.64 oz. (18.14g)
Shock Resistance	Withstands 3-foot (1 meter) drop to hard surface
Certification	CE Mark, Calibration Traceable to N.I.S.T., RoHS Compliant,
IP Rating	IP56
Storage conditions	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation

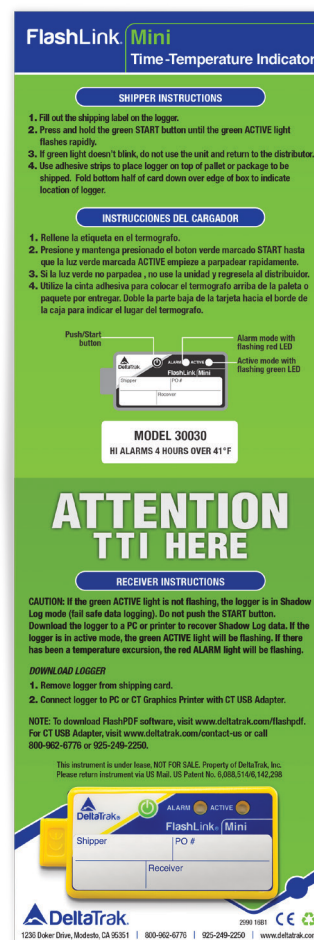

### Model 30030

- Compact, single-use, time temperature indicator
- Monitors temperature during transport to meet FSMA and FDA requirements
- Immediate visual pass/fail indicator
- Alarm event triggered after 4 hours of temperature abuse
- Mounted on high-visibility locator card
- Post-trip evaluation service available

DeltaTrak manufactures products under an ISO 9001:2008 registered quality management system

SS0213\_16E1

