


# Product Specifications

## FlashLink® PDF In-Transit Logger



<b>Measurement Range</b>	-40°F to 122°F (-40°C to 50°C)
<b>Temperature Resolution</b>	0.1°F/°C
<b>Accuracy</b>	±1.0°F from -4°F to 113°F, (±0.5°C from -20°C to 45°C); ±2.0°F above 113°F, (±1.0°C above 45°C); ±2.0°F below -4°F, (±1.0°C below -20°C);
<b>Data Capacity</b>	3,823 data points
<b>Data Download Time</b>	30 seconds typical for 3,823 points
<b>Factory Programmable Alarm Levels</b>	High/low limits over entire temperature range
<b>Battery</b>	Coin Cell Lithium battery
<b>Dimensions</b>	1.93" x 3.62" x 0.67" (49mm x 92mm x 17mm)
<b>Casing</b>	ABS plastic
<b>Weight</b>	1.6 oz. (45.36 grams)
<b>Shock Resistance</b>	Withstands 3-foot (1 meter) drop to hard surface
<b>Certification</b>	CE Mark, Calibration traceable to NIST, ROHS Compliant, BSS 7061 Compliant
<b>Display</b>	LCD, Red LED Alarm
<b>Storage conditions</b>	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation
<b>PDF Standards</b>	Complies with ISO19005-1, PDF/A, 21 CFR Part 11
<b>System Requirements</b>	Windows PC with current operating system, Adobe Reader
<b>Download Requirements</b>	Direct USB connection

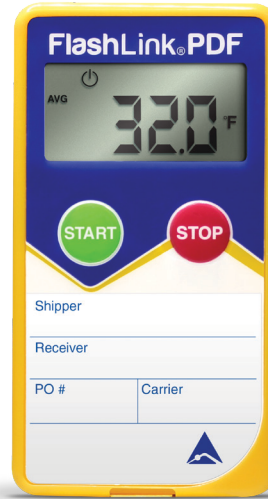

Models	5-Day	15-Day	45-Day	75-Day
<b>Logging Interval</b>	1 minute 54 seconds	5 minute 40 seconds	16 minute 58 seconds	28 minute 16 seconds
<b>°F</b>	40420	40430	40440	40450
<b>°C</b>	40421	40431	40441	40451

- Single-use temperature logger
- Large, easy to read LCD display
- No software required to download data
- Built-in USB connector, no special reading devices needed
- Automatically creates secure PDF report and CSV file
- Trip history statistics available on LCD
- Patented Shadow Log® feature guarantees data even if the shipper fails to start the logger
- High/low alarm indicators
- Service available to custom configure logging parameters, alarms, delayed start

Patent No. 6,088, 514

DeltaTrak manufactures products under an ISO 9001:2015 registered quality management system

SS 40420-X\_18J1

