

GO Real-Time 4G/5G Global Tracker

Temperature, humidity, location and security using cellular M2M technology

Maintain control over quality every step of the way

Keeping track of shipments has never been easier with the GO Real-Time 4G/5G Global Tracker. Using cellular technology, trackers provide temperature and location alerts as your shipment moves through the supply chain. And now, with our tri-mode 5G cellular technology (CATM/NBLoT/GSM), connectivity and access to your data is further enhanced. Rest assured that visibility to temperature, humidity, and location data will be available despite the ongoing transition in the cellular technology industry.

Oversight Dashboard. Data at your fingertips

Comprehensive and automated reporting is provided through the Oversight Dashboard and the Oversight Mobile app. Data is encrypted, providing security as it moves to the cloud. Information is at your fingertips while you are on the go with Oversight Mobile. Check status and create shipments direct from a phone or tablet. View current maps, graphs, and charts of key shipments including temperature, humidity, security, and location details. Shipment summary reports include additional details such as device serial number, trip name and duration, mean kinetic temperature, and time above or below range. The Oversight Mobile app is available in English, Chinese, Spanish, Italian, German, Portuguese, Turkish and French.



Real-time alerts



Tri-mode 5G cellular technology (CATM/NBLoT/GSM)



Automated / scheduled cloud reporting via Oversight




Authenticated and unauthenticated user access



Recycle with GO GreenSense™


Technical Specifications

Battery:	UN38.3 Compliant
Cellular:	CAT M1/NB1: B1/B2/B3/B4/B5/B8/ B12/B13/B18/B19/B20/B26/B28/B39 EGPRS: 850/900/1800/1900MHz
Certifications:	FCC, PTCRB, CE, IC
Device Storage:	Optimal: Below 20°C and 60% RH
Humidity Accuracy:	At 25°C, between 20% RH and 80% RH: ±5% RH
Humidity:	20% to 95% operation typical
In-Use Life:	Tri-mode with up to 20 days of operation, 6-minute measurements reported at 18-minute intervals
IP Rating:	IP62
Light Sensor Sensitivity:	±0.5 Lux, minimum detectable 1.0 Lux
Oversight Dashboard:	Emerson.com/Oversight
Probe:	Optional (-80°C to 100°C operating)
Recycle Options:	GO GreenSense™ program
Reusable:	Up to 50x recharged with monthly Oversight subscription (RST-TH00 model only)
Shelf Life:	Shipped with a minimum in-use and shelf life of approximately 6 months. Please check the “Activate By Date” on the product box and follow a first-in-first out process.
Size:	2.9 in x 3.8 in x 1.0 in (73 mm x 95 mm x 25 mm)
Temperature Range:	-20° C to 60° C (-4° F to 140° F) operating environment
Temperature Accuracy:	±0.5°C (0.9°F) typical between -20°C to 60°C (-4°F to 140°F)
Weight:	91 g (0.2 lbs)

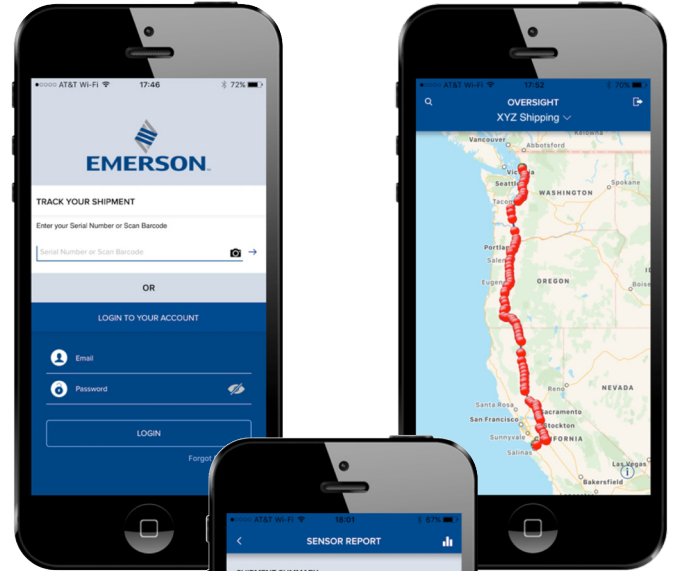

Oversight Mobile
Login

Oversight Mobile
Map Detail

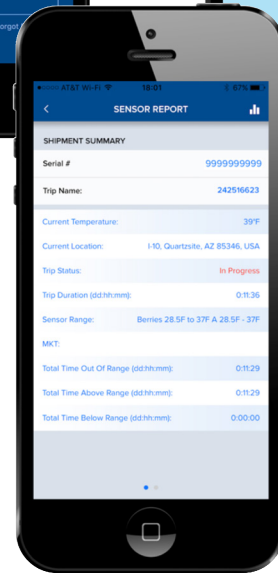

Oversight Mobile
Summary Report



Download the
Oversight Mobile App

Contact Information

0755-84200058
sales@eofirm.com