

GO Nano Gateway

Simplified end-to-end cold chain visibility

Equipped with a global cellular modem and state of the art BLE connectivity, the GO Nano Gateway ensures global visibility of temperature data from GO Nano BLE loggers.

The integration of Bluetooth 5 technology allows the gateway to effortlessly connect with GO Nano BLE temperature loggers, facilitating automatic and continuous monitoring without the need for manual intervention. This ensures that your data collection process is not only streamlined but also highly efficient.

Coupled with the Oversight Connect mobile app, the GO Nano system offers additional efficiencies and cold chain visibility.

The gateway operates around-the-clock through continuous power from standard wall outlets and comes equipped with a battery back-up in the event of power outages.

This feature minimizes downtime and helps ensure that your temperature data is consistently available. With its sleek and unobtrusive design, the gateway fits seamlessly into a variety of environments, ranging from office spaces to warehouses, enhancing rather than distracting from the existing aesthetic.

Designed to perform in demanding industrial environments, the gateway incorporates robust and durable components, guaranteeing reliability even under challenging operational conditions.

User-friendliness is at the core of this product; the installation process is straightforward, with limited expertise required. Users simply follow the user manual to power up the device, and it automatically begins to collect and transmit data.

When paired with a GO Nano Gateway, GO Nano BLE data integrates seamlessly with Copeland's Oversight Logger portal, providing instant access for informed, real-time decision making. Further coupling with the Oversight Connect mobile app, creates a powerful system with reliable backup when gateways may be unavailable.



-  Bluetooth protocols
-  Global cellular coverage (CATM/NB IoT/2G)
-  Continuously powered
-  Battery backup
-  Sleek design
-  GO Nano BLE detection and data upload


COPELAND

Technical specifications


Cellular connectivity (global bands)	CATM/NB IoT
Bluetooth protocols	BLE 4, BLE 5
BLE scanning	Continuous
Data upload interval	5-minutes
Internal memory	Yes (256MB non-volatile flash)
Operating range	-20C to +60C (-4F to 140F) RH 0-99% (non-condensing)
Power	Continuous AC power (120-240V)
Battery backup	Yes (3.1AH) NiMH
Mounting options	Built-in mounting plate and accessories
Dimensions	175x200x55mm (6.9x7.9x2.16inches)
Weight	0.63kg (1.4 lbs)
IP rating	IP51
Optimal storage conditions	Temperature: 5°C to 30°C. (41°F to 86° F) Humidity: < 70%
Certifications	 FCC ID: AMHTB60L, IC: 1024A-TB60L  ZI Via dell'Industria, 27 32016 Alpage (BL) ITALY



Download the Oversight Connect app

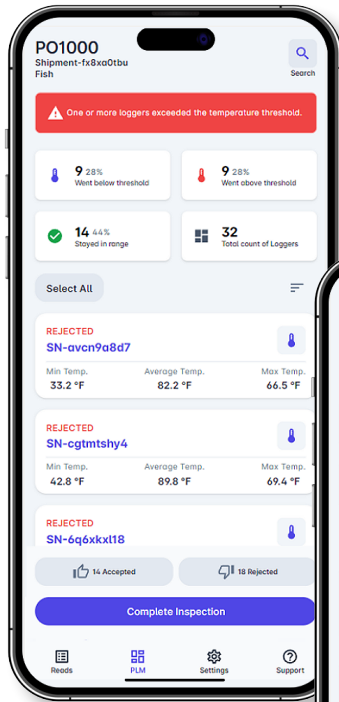

Performance of individual measurement points of PO

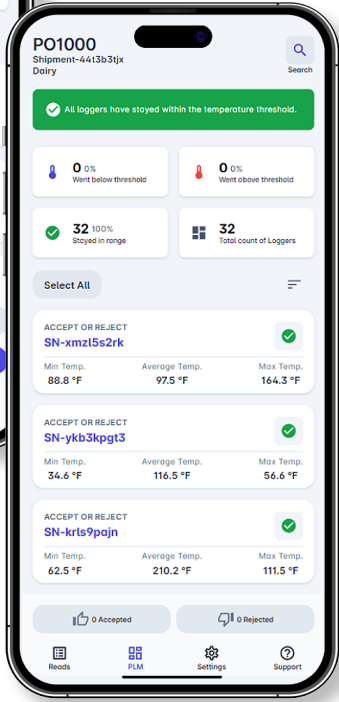

GO Nano Logger

At a glance PO level performance

To learn more, visit copeland.com/cargo

,Rev1.0425 ©2025 Copeland LP.