

GO PDF Mini Logger

*Temperature monitoring logger in compact size
Now available with the latest Silent Mode feature*

Temperature monitoring

The GO PDF mini loggers monitor time and temperature of perishable products during distribution and storage. These easy-to-use loggers eliminate the need for reading devices and proprietary software and are optimal for applications requiring fully independent operation – simply activate and place with your shipment.

Due to their small size, the GO PDF mini loggers are versatile and feature a USB connection which can be plugged directly into the USB port of a computer. Once connected, the logger automatically generates a PDF file containing complete time, temperature history including graphs and summary data, as well as a complete table of all temperature readings during shipment. For added convenience, GO PDF Mini also automatically generates a CSV file.

GO PDF Mini general use

GO PDF mini loggers provide basic temperature monitoring data. Loggers feature a typical accuracy range of +/- 0.5°C between -20°C to 40°C (-4°F to 104°F) over the operating range of -30°C to 70°C (-22°F to 158°F). GO PDF mini loggers can record data for either 15, 60 or 90 days and function as a data logger only with no alerting capabilities.

GO PDF Mini silent mode

All GO PDF mini loggers will now feature Silent Mode. This feature enables data collection in the event the logger was unintentionally not activated by the shipper. Time and temperature data will be stored in default 30 minute intervals with up to 150 days recorded.




-  Small, flat, waterproof recorder
-  New "Silent Mode" feature self activates the logger, helping ensure data collection
-  Digitally records time and temperature data
-  Unique design plugs directly into USB port; generates PDF data file
-  Fully independent operation - eliminates readers and software
-  Great for monitoring exports/ imports and worldwide shipments

COPELAND

Technical specifications

Alarm indicators	No (historical data logger only)
Battery	UN38.3 compliant
Certifications	FCC, CE, RoHS, EN12830
CSV file	Yes
Export to other applications	Generates PDF, CSV
In-use life	15, 60, 90 days (3, 12 and 20 min recording intervals, respectively)
IP rating	IP67
Marking capabilities	No
Operating environment	-30°C to 70°C (-22°F to 158°F)
Operating system	Windows 32-bit, 64-bit
Recording interval	Every 3, 12 and 20 minutes
Resolution	0.1°C
Shelf life	12 months
Size	EO: sales@eofirm.com www.eofirm.com 0755-84200058 75 mm) without pouch
Start delay	30 minutes
Stop button	No
Temperature accuracy	±0.5°C typical between -20°C to 40°C (-4°F to 104°F) ±1.0°C (other ranges)
Time zone	Reconciled to UTC
Weight	12.00 g (0.42 oz)

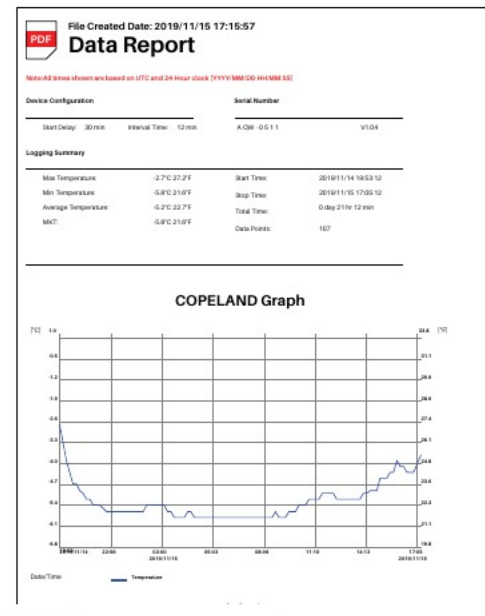

PDF Example

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

To learn more visit copeland.com/cargo

TM.DS.Rev1.1120 ©2024 Copeland LP.

COPELAND