

GO Real-Time 4G/5G N tracker

Temperature, humidity, location and security using cellular M2M technology.

Maintain control over quality every step of the way

Keeping track of shipments has never been easier with the GO Real-Time 4G/5G-N tracker. Using cellular technology, trackers provide temperature and location alerts as your shipment moves through the supply chain. And now, with our 4G/5G cellular technology, connectivity and access to your data is further enhanced. Rest assured that visibility to temperature, humidity, and location data will be available despite the ongoing transition in the cellular technology industry.

Oversight dashboard. Data at your fingertips.

Comprehensive and automated reporting is provided through the Oversight Dashboard and the Oversight Mobile app. Data is encrypted, providing security as it moves to the cloud. Information is at your fingertips while you are on the go with Oversight Mobile. Check status and create

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

graphs, and charts of key shipments including temperature, humidity, security, and location details. Shipment summary reports include additional details such as device serial number, trip name and duration, mean kinetic temperature, and time above or below range. The Oversight Mobile app is available in English, Chinese, Spanish, Korean, Russian, Italian, German, Portuguese, Turkish and French.



Non-Lithium Battery



Tri-mode CATM (or NBIoT)/
GSM cellular technology



Automated/scheduled cloud
reporting via Oversight



Real-time alerts via text and email



Recycle with GO GreenSense


COPELAND

Technical specifications



Battery	Non-Lithium, NiMH
Cellular	CAT M1/NB1: B1/B2/B3/B4/B5/B8/B12/B13/B18/B19/B20/B26/B28 EGPRS: 850/900/1800/1900MHz
Certifications	FCC, IC, CE, PTCRB
Device storage	Optimal: Below 20°C and 60% RH
Humidity accuracy	At 25°C, between 20% RH and 80% RH: ±10% RH
Temperature accuracy	±0.5°C (0.9°F) typical between -20°C to 60°C (-4°F to 140°F)
Temperature range	-20° C to 70° C (-4° F to 158° F) operating environment
In-use life*	Up to 18 days of operation, 6-minute measurements reported at 18-minute intervals
IP rating	IP44
Light sensor sensitivity	±0.5 Lux, minimum detectable 1.0 Lux
Oversight dashboard	Copeland.com/Oversight
Recycling options	GO GreenSense program
Shelf-life	Shipped with a minimum in-use and shelf life of approximately 6 months. Please check the "Activate By Date" on the product box and follow a first-in-first out process.
Size	3.07 in x 2.06 in x 1.31 in (78 mm x 52 mm x 33 mm)
Weight	136 g (0.30 lbs)

*Specifications are a work in progress and may differ upon product release.

Oversight mobile login

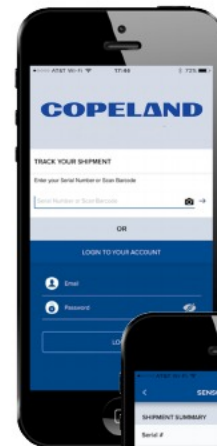

Oversight mobile map detail*

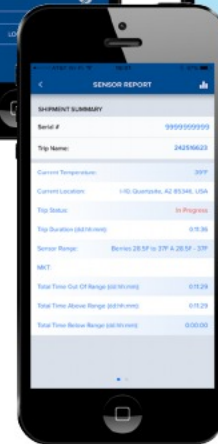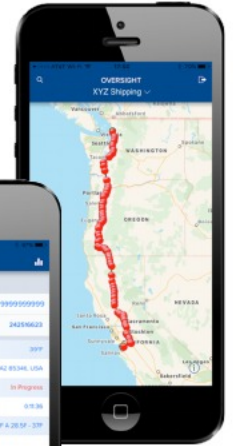

Oversight mobile summary report



Download the
oversight mobile app

To learn more, visit copeland.com/cargo

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

TMC-TH00.DS.Rev 1.1120 ©2024 Copeland LP.

COPELAND