

GO Real-Time Lux tracker

Real-time temperature and location

Protect your product in-transit

Combining our real-time temperature and location reporting technology with a highly sensitive light sensor, the GO Real-Time Lux tracker detects unauthorized access to your high value assets during transit. Whether your cargo is at the border, a DOT checkpoint, or the Receiver's dock, you know in real-time when and where your shipment is being accessed as well as the temperature of your product throughout the trip. This easy to use system provides global visibility at an affordable cost and fits in the palm of your hand. Simply pull the tab to activate the device, place in a container or trailer and input the serial number into Oversight to access the shipment data in real-time.

Oversight dashboard & mobile app

Comprehensive and automated reporting is provided through Oversight and the Oversight Mobile app. Data is encrypted, providing security as it moves to the cloud. Information is at your fingertips while you are on the go with Oversight Mobile. Check status and create shipments

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

and charts of key shipments including temperature, security, and location details. Shipment summary reports include the GO Real-Time Lux serial number, trip name, current temperature, current location, trip status, trip duration, temperature range, mean kinetic temperature, total time out of range, total time above range, total time below range, and temperature graph. The Oversight Mobile app is available in English, Chinese, Spanish, Korean, Russian, Italian, German, Portuguese, Turkish and French.



Real-time alerts for loss prevention



Automated/scheduled cloud reporting via Oversight



Oversight Mobile app (iOS and Android compatible) interface



Authenticated and unauthenticated user access




Recycle with GO Green

COPELAND


Technical specifications

Battery	UN38.3 compliant
Cellular	850/900/1800/1900 MHz Quadband GSM/GPRS
Certifications	FCC, PTCRB, CE, Anatel, IFETEL, CNC, ICASA, EAC, RTCA/DO-160G Compliant
Device storage	Optimal: Below 20°C and 60% RH
Temperature accuracy	±0.5°C (0.9°F) typical between -20°C to 60°C (-4°F to 140°F)
Temperature range	-20°C to 70°C (-4°F to 158°F) operating environment.
In-Use life*	Up to 15 days operation at 0°C and up to 7 days operation at -20°C with 6-minute location and temperature measurements reported at 18-minute intervals
IP rating	IP54
Light sensor Sensitivity	±0.5 Lux, minimum detectable 1.0 Lux
Oversight Dashboard	copeland.com/Oversight
Recycling options	GO GreenSense program
Shelf-life	Shipped with a minimum in-use and shelf life of approximately 6 months. Please check the "Activate By Date" on the product box and follow a first-in-first out process.
Size	3.0 in x 2.0 in x 0.75 in (76 mm x 51 mm x 19 mm)
Weight	68 g (0.15 lbs)

*Specifications are a work in progress and may differ upon product release.

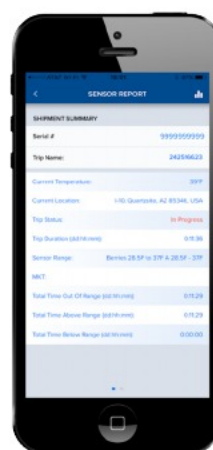

Summary report

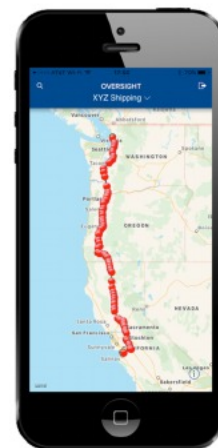

Map detail



Email Notification



Download the oversight mobile app

To learn more, visit copeland.com/cargo

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

TS2-TL00.DS.Rev1.1120 ©2024 Copeland LP.

COPELAND