

GO Real-Time XL 4G/5G tracker

Temperature, humidity, location and security using cellular M2M technology

Global visibility and protection for extended shipment

Extended battery life provides full coverage for your products on the road, in the port and out on the water. When your ship leaves port, the GO Real-Time XL 4G/5G tracker keeps track of the temperature and humidity. Every time the ship nears port, the unit automatically connects and uploads data before the ship reaches the docks. And now, with our tri-mode 4G/5G cellular technology, connectivity and access to your data is further enhanced. Rest assured that visibility to temperature and location data will be available despite the ongoing transition in the cellular technology industry. The GO Real-Time XL 4G/5G tracker senses light when doors are opened and alerts you when your products are at risk on the road.

Analytics to support supply chain excellence

The Oversight360 cloud platform and mobile app provides comprehensive, real-time visibility into your shipments for enhanced logistics management. Track shipment status from device activation to delivery via a web and mobile-friendly interface. Access detailed maps, charts and timelines to monitor location, temperature, security, and other critical metrics. Generate in-depth shipment summary reports with essential details, including device serial numbers, trip specifics, mean kinetic temperature, and deviations from defined ranges. With multilingual support, Oversight360 ensures seamless global monitoring for shipments across any origin or destination.



Extended battery life to cover international shipments



Tri-mode CATM (or NBloT)/ GSM cellular technology



Global visibility with email/text alerts



Protect your product in-transit and ensure door security



Recycle with GO GreenSense

COPELAND

Technical specifications

Battery	UN38.3 Compliant
Cellular	CAT M1/NB1: B1/B2/B3/B4/B5/B8/ B12/B13/B18/B19/B20/B26/B28 EGPRS: 850/900/1800/1900MHz
Certifications	FCC, IC, CE, PTCRB, RCM, IFETEL, RTCA/DO-160G Compliant
Device storage	Optimal: Below 20°C and 60% RH
Humidity accuracy	At 25°C, between 20% RH and 80% RH: ±10% RH
Humidity range	20% to 95% operation typical
In-use life*	Tri-mode with up to 60 days of operation, 10-minute measurements reported at 60-minute intervals
IP rating	IP44
Light sensor sensitivity	±0.5 Lux, minimum detectable 1.0 Lux
Oversight360 dashboard	Copeland.com/Oversight
Recycle options	GO GreenSense program
Shelf life	Shipped with a minimum in-use and shelf life of approximately 6 months. Please check the "Activate by [date]" on the product box and follow a first-in-first out process
Size	3.07 in x 2.06 in x 1.31 in (78 mm x 52 mm x 33 mm)
Temperature range	-20° C to 70° C (-4°F to 158°F) operating environment
Temperature accuracy	±0.5°C (0.9°F) typical between -20°C to 60°C accuracy (-4°F to 140°F)
Weight	0.15 lbs (68 g)

* Battery life can vary depending on report intervals and other environmental factors such as temperature, cellular connectivity, etc.

WARNING!


Some GO Real-Time trackers may contain lithium. For proper handling instructions, please visit [Copeland.com/battery](https://copeland.com/battery).




Download the Oversight360
web and mobile apps

To learn more visit copeland.com/cargo


25577 EN DS CS Go Real-Time XL 4G-5G ©2025 Copeland LP.

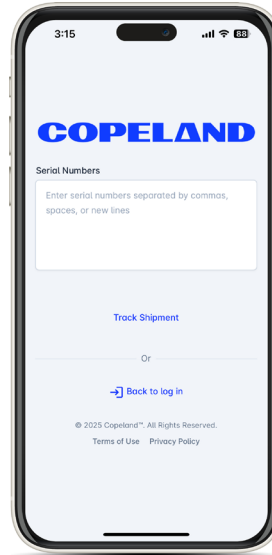

Oversight360
shipment tracking

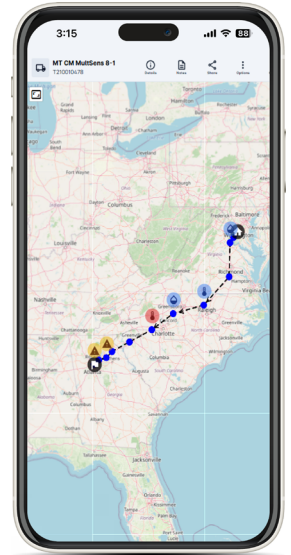

Oversight360
map detail

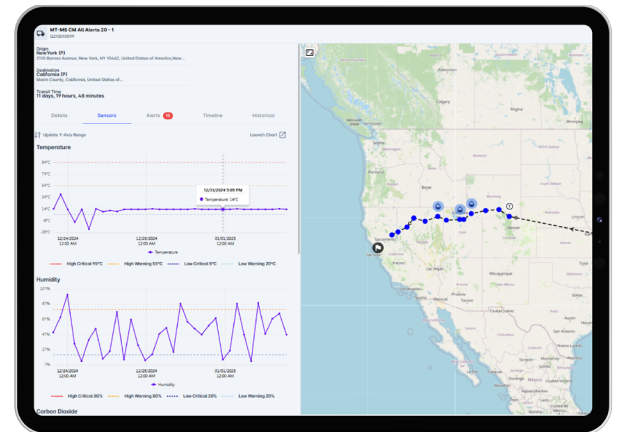

Oversight360 summary report

COPELAND