

GO Real-Time XL 4G/5G-LT Tracker

Temperature, humidity, location and security using cellular M2M technology.

Global visibility and protection for extended shipment

Extended battery life provides full coverage for your products on the road, in the port and out on the water. When your ship leaves port, the GO Real-Time XL 4G/5G-LT tracker keeps track of the temperature and humidity. Every time the ship nears port, the unit automatically connects and uploads data before the ship reaches the docks. And now, the new -LT series tracker is specifically designed for low temperature shipments of frozen goods (down to -30C). With improved location accuracy and ever-expanding 4G/5G global networks, you can rest assured that visibility to your perishable shipments will be available when you need it most. The GO Real-Time XL 4G/5G-LT tracker senses light when doors are opened and alerts you when your products are at risk on the road.

Analytics to support supply chain excellence.

Oversight360 cloud-based platform provides comprehensive, real-time visibility into your shipments for enhanced logistics management. Track shipment status from activation to delivery via a web and mobile-friendly interface. Access detailed maps, charts and timelines to monitor location, temperature, security, and other critical metrics. Generate in-depth shipment summary reports with essential details, including device serial numbers, trip specifics, mean kinetic temperature, and deviations from defined ranges. With multilingual support, Oversight360 helps ensure seamless global monitoring for shipments across any origin or destination.



Extended battery life to cover international shipments



Tri-mode CATM (or NBIoT) / GS Mcellular technology



Global visibility with email/text alerts



Protect your product in-transit and ensure door security



Recycle with GO GreenSense

COPELAND

Technical specifications

Battery	UN38.3 Compliant
Cellular	CAT M1/NB1: B1/B2/B3/B4/B5/B8/ B12/B13/B18/B19/B20/B26/B28 EGPRS: 850/900/1800/1900MHz
Certifications***	FCC, IC, PTCRB, CE, UK/CA, ROHS, REACH
Device storage	Optimal: Below 20°C and 60% RH
In-use life*	Tri-mode with up to 60 days of operation, 10-minute measurements reported at 60-minute intervals
IP rating	P44
Light sensor sensitivity	+/-0.5 Lux, Minimum detectable, 1 Lux
Oversight360 dashboard	www.copeland.com/oversight
Recycle options	GO GreenSense program
Shelf-life	Shipped with a minimum in-use and shelf life of approximately 6 months. Please check the "Activate By Date" on the product box and follow a first- in-first out process.
Size	3.2 in x 2.5 in x 1.2 inch (80 mm x 63 mm x 28 mm)
Temperature range	-30°C to 60°C (-22°F to 140°F) operating environment
Temperature accuracy	±0.5°C (0.9°F) typical between -20°C to 60°C (-4°F to 140°F)
Default reporting and recording intervals	10-minute measurements reported t at 60-minute intervals
Weight	0.3 lbs (140 g)

* Battery life can vary depending on report intervals and other environmental factors such as temperature, cellular connectivity, etc.


WARNING!

Some GO Real-Time trackers may contain Lithium. For proper handling instructions please visit copeland.com/battery.




Download the Oversight360
web and mobile apps


To learn more visit copeland.com/cargo
©2025 Copeland LP.

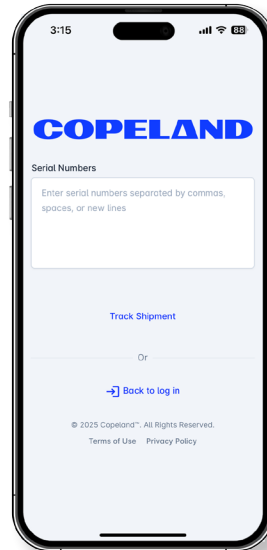

Oversight360
shipment tracking

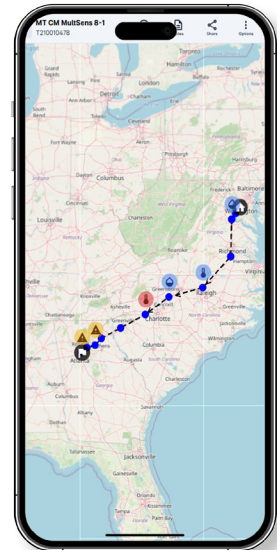

Oversight360
map detail

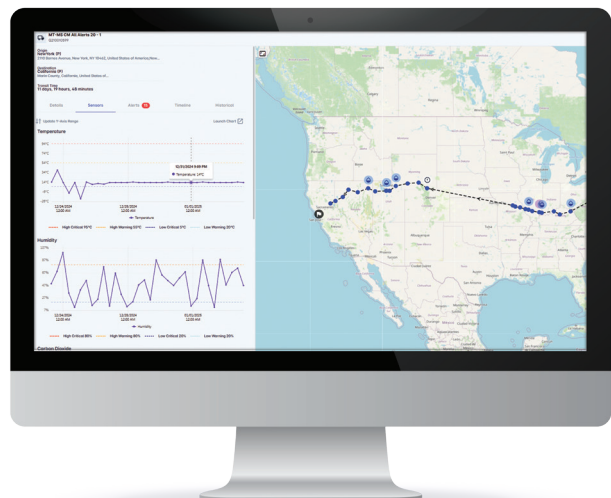

Oversight360
summary report

COPELAND