

GO Real-Time 4G/5G-LT tracker

*Temperature, location and security
using cellular M2M technology.*

Global visibility and protection for extended shipment

Extended battery life provides full coverage for your products on the road, in the port and out on the water. When your ship leaves port, the GO Real-Time XL 4G/5G-LT tracker keeps track of the temperature and humidity. Every time the ship nears port, the unit automatically connects and uploads data before the ship reaches the docks. And now, the new -LT series tracker is specifically designed for low temperature shipments of frozen goods (down to -30C). With improved location accuracy and ever-expanding 4G/5G global networks, you can rest assured that visibility to your perishable shipments will be available when you need it most. The GO Real-Time XL 4G/5G-LT tracker senses light when doors are opened and alerts you when your products are at risk on the road.

Oversight dashboard. Data at your fingertips.

Comprehensive and automated reporting is provided through the Oversight Dashboard and the Oversight Mobile app. Data is encrypted, providing security as it moves to the cloud. Information is at your fingertips while you are on the go with Oversight Mobile. Check status and create

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

graphs, and charts of key shipments including temperature, humidity, security, and location details. Shipment summary reports include additional details such as device serial number, trip name and duration, mean kinetic temperature, and time above or below range. The Oversight Mobile app is available in English, Chinese, Spanish, Korean, Russian, Italian, German, Portuguese, Turkish and French.



Extended battery life to cover international shipments



Tri-mode CATM (or NBIoT) / GSM cellular technology



Global visibility with email/text alerts



Protect your product in-transit and ensure door security

COPELAND

Technical specifications

Battery	UN38.3 Compliant
Cellular	CAT M1/NB1: B1/B2/B3/B4/B5/B8/ B12/B13/B18/B19/B20/B26/B28 EGPRS: 850/900/1800/1900MHz
Certifications	FCC, IC, CE, PTCRB, RCM, ANATEL, MIC, MOC, INDOTEL, CONATEL, RTCA/DO-160G Compliant
Device storage	Optimal: Below 20°C and 60% RH
In-use life	Tri-mode with 60 days of operation, 10-minute measurements reported at 60-minute intervals
IP rating	IP44
Light sensor sensitivity	±0.5 Lux, minimum detectable 1.0 Lux
Oversight dashboard	Copeland.com/Oversight
Recycle options	GO GreenSense program
Shelf life	Shipped with a minimum in-use and shelf life of approximately 6 months. Please check the "Activate By Date" on the product box and follow a first-in-first out process.
Size	3.2 in x 2.5 in x 1.2 inch (80 mm x 63 mm x 28 mm)
Temperature range	-30°C to 60°C (-22°F to 140°F) operating environment
Temperature accuracy	±0.5°C (0.9°F) typical between -20°C to 60°C (-4°F to 140°F)
Weight	0.3 lbs (140 g)


WARNING!

Some Go Real-Time Trackers may contain Lithium. For proper handling instructions please visit copeland.com/battery.



Download the
Oversight Mobile app

Oversight mobile login

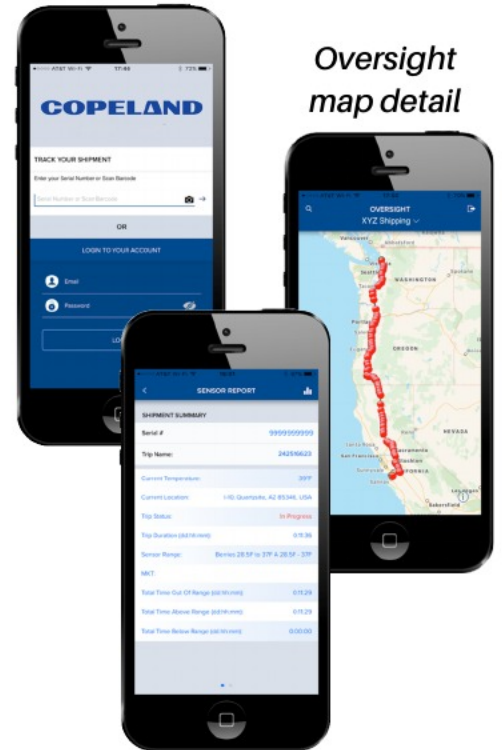

Oversight mobile summary report

To learn more, visit copeland.com/cargo

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

TXC-TH04.DS.Rev1.0322 ©2024 Copeland LP.

COPELAND