


Product Specifications

FlashLink. Prime 2G Real-Time In-Transit Logger

Temperature Range	-22°F to 158°F (-30°C to 70°C)
Temperature Accuracy	±0.5°C from -10°C to 45°C (±0.9°F from 14°F to 113°F), ±1.0°C (2.0°F) Other
Temperature Resolution	0.1°F/°C
Temperature Sensor Type	Internal Digital Temperature Sensor (NIST traceable)
Light Sensor Range	0 to 52000 lux
Light Detecton Accuracy	0.01 lux
Usage Type	Single-use
Data Capacity	Maksimum 28800 Kayıt
Logging Interval	5 Min.
Data Upload Interval	15 Min.
Trip Duration	15-Day (based on logging and uploading intervals)
Cellular	Global Quad-band GSM(850, 900, 1800, 1900MHz), GPRS data
SIM	Internal Embedded (Global Data Roaming)
Battery Shelf Life	1 year
Logger Dimensions	4.05in x 2.41in x 1.18in (103mm x 61.3mm x 30mm)
Weight	4.16 oz (118 grams)
Waterproof Rating	IP64
Certification	FCC, RoHS, NIST traceable temperature accuracy
PDF Report Backup	Micro USB to USB cable to download full trip PDF report

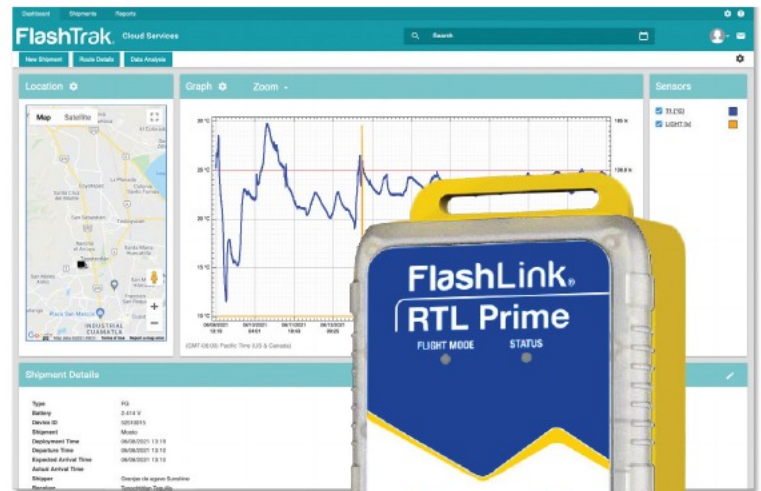

Model 22362

- Global cellular network real-time loggersKonum, sıcaklık ve ıkkıddetini takip eder
- Monitors location, temperature and light
- Proactively manage shipment conditions to reduce the risk of product loss due to temperature excursions
- FlashTrak Cloud Service platform offers different levels of access to optimize user experience and API integration into customer systems. FlashTrak receiver program allows shippers to share access to alerts and shipment conditions
- USB option for downloading data and access to PDF reporting of trip details should communications not be available
- Light sensors alert you to unplanned shipment entries which helps reduce and avert potential product theft during transportation
- Airline and Maritime options ensure access to all trip data can be accessed and reported completely when transmissions allow

DeltaTrak manufactures and operates under an ISO 9001:2015 registered quality management system

SS 22362 22F2

