



用户指南


Q-tag 四边形

目录

目录.....	2
文件目的.....	3
标准版和启动版.....	4
报警说明.....	5
操作说明.....	6
分娩状态/睡眠模式.....	6
激活 Q-tag Quad	6
启动延迟时间（可选）	7
温度记录.....	7
放置 Q-tag Quad	7
温度记录期间的显示指示.....	8
温度记录结束/停止模式（仅适用于标准版本）	9
术语解释.....	10
睡眠模式.....	10
启动延迟时间（可选）	10
过期代码说明.....	11
重要信息.....	12
激活/操作.....	12
责任.....	12
电池.....	12
使用寿命.....	13
注意.....	13
监管认证.....	13

Document Purpose

This document provides detailed information about the Q-tag® Quad.

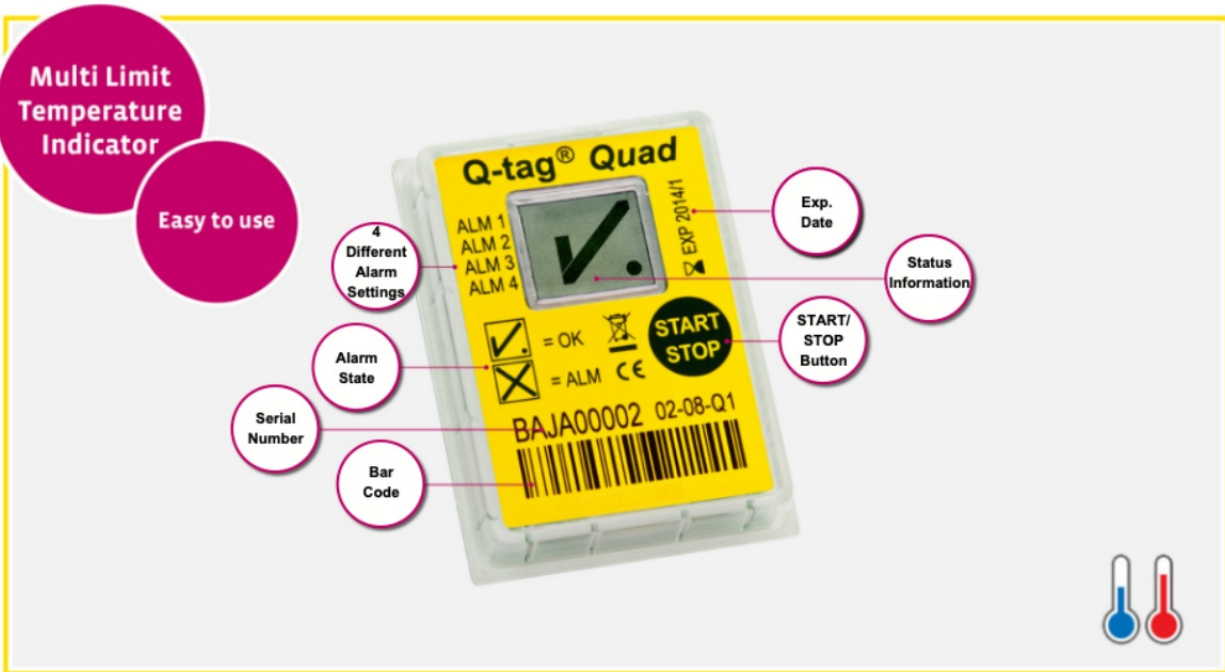

Q-tag® Quad: As Simple as Life Should Be

Internationally recognized symbols like the ok and the alarm symbol show the alarm state clearly. The Q-tag Quad is a highly accurate electronic temperature monitor. It is 100% calibrated and has a measuring accuracy of $\pm 0.5^{\circ}\text{C}$. The temperature measurements are made every minute over the entire monitoring time. Swiss quality in a compact format!

Up to 4 different alarm settings can be programmed for temperatures between -25°C to $+50^{\circ}\text{C}$. Alarms are individually set to meet customer requirements. Take control!

- User friendly, reliable and as accurate as a Swiss watch
- Individual alarms programmed to customer specifications
- Immediate and easy decision-making at a glance, thanks to a simple OK/alarm display

View [Technical Specification](#)

Standard Version and Version Start


Standard Version (Start and Stop)	
Version Start	

Alarm Explanation

ALM 1		Single-event alarm “high”
ALM 2		Cumulative alarm “high”
ALM 3		Cumulative alarm “low” or “high”
ALM 4		Single-event alarm “low”

Operating Instructions

State of Delivery / Sleep Mode

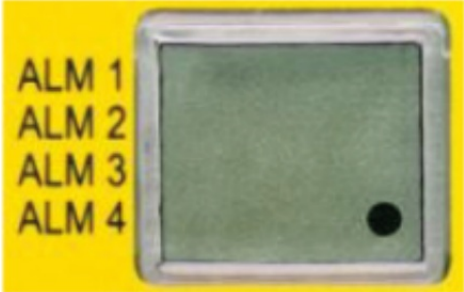 The image shows the Q-tag Quad device with a yellow background. On the left, there are four labels: ALM 1, ALM 2, ALM 3, and ALM 4. The device itself is a small, square, greenish-grey unit with a black dot (the running indicator) visible on its screen.	Q-tag Quad is shipped in its so-called “Sleep Mode”. This will be observed by the constantly flashing dot (running indicator) on the display. In sleep mode, no data will be recorded.
--	--

Activation of the Q-tag Quad

Please always verify the expiry date prior to using any device (see [Expiry Code Explanation](#))

 The image shows the Q-tag Quad device with a yellow background. A hand is pressing the 'START' button. The device screen shows a black dot (the running indicator). Below the screen, there are labels: ALM 1, ALM 2, ALM 3, and ALM 4. To the right of the screen, there is a label 'EXP 2014/1'. Below the screen, there is a label 'BAJA00002 02-08-01'. At the bottom, there is a barcode and the website 'www.q-tag.ch'.	The device is activated by pressing the START- button for at least 2 seconds.
 The image shows the Q-tag Quad device with a yellow background. The device screen shows a large checkmark (✓) and a black dot (the running indicator). Below the screen, there are labels: ALM 1, ALM 2, ALM 3, and ALM 4. To the right of the screen, there is a label 'EXP 2014/1'. Below the screen, there is a label 'BAJA00002 02-08-01'. At the bottom, there is a barcode and the website 'www.q-tag.ch'.	The active recording is shown by the ✓ (OK symbol) and the flashing dot on the display.

Note (only for standard Version): Prior to start make sure that the device is not yet activated, otherwise it will stop. To avoid accidental deactivation of the device, the stop function is locked for about 1 minute after the activation.

Start Delay Time (Optional)

If a start delay time has been programmed, it will be activated the moment you press the START-button for at least 2 seconds. The start delay time is not visible. Temperature recording will only start after completion of the start delay time.

To avoid accidental deactivation of the device, the stop function is locked during the start delay time.

Temperature Recording

Placing the Q-tag Quad

The activated monitor must be placed immediately in its predetermined location. It is recommended to place the device as close to the supervised goods as possible. This is an important prerequisite to ensure the temperatures observed by the device are as close to the product temperature as possible.

Precondition the device for 30 minutes to reach the target temperature before use, especially if no start delay is set. This helps prevent inaccurate readings at start-up.

Display Indication During Temperature Recording

Display examples of temperature recording:

 The image shows a yellow Q-tag Quad label. On the left, there are four labels: ALM 1, ALM 2, ALM 3, and ALM 4. In the center is a square display area showing a large black checkmark. To the right of the display is a vertical label: EXP 2014/1. At the bottom left, there is a small checkmark icon followed by "= OK". At the bottom right, there is a small icon of a crossed-out clock followed by "START".	OK Display An ✓ (OK symbol) is indicated during normal operation as long as no alarms have been recorded. The monitored goods have not been exposed to temperature and time conditions outside the pre-set alarm parameters
 The image shows a yellow Q-tag Quad label. On the left, there are four labels: ALM 1, ALM 2, ALM 3, and ALM 4. In the center is a square display area showing a large black 'X' with four arrows pointing outwards from the center. To the right of the display is a vertical label: EXP 2014/1. At the bottom left, there is a small checkmark icon followed by "= OK". At the bottom right, there is a small icon of a crossed-out clock followed by "START".	ALARM Display The ✓ (OK symbol) will be replaced by an ✕ (ALARM symbol) as soon as any alarm has been triggered. Additional arrows are shown in the left display area to indicate which limit has been violated. The monitored goods have been exposed to temperature and time conditions outside the pre-set alarm parameters. The ALARM indication cannot be cancelled nor reset.

End of Temperature Recording / Stop Mode (only for standard version)



The Q-tag Quad may be stopped if the recording shall be finished, e.g. if a shipment has reached its final destination.

To do so, the STOP-button shall be pressed for at least 2 seconds. The running indicator disappears. The ✓ (OK symbol) or ✕ (ALARM symbol) and alarm flags remain stable for at least 3 months.

Explanation of Terms

Sleep Mode

This is the state of delivery of the device. It is the lowest current consumption state of the Q-tag Quad. The device is not activated, and no data recording is made.

Start delay time (optional)

The start delay is an optional functionality. If a start delay has been factory preset, the Q-tag Quad starts recording the temperature after the completion of the start delay time.

Expiry Code Explanation

Sample: EXP 2017-02

Means that the expiry date of the Q-tag Quad is February 2017

Important Information

Activation / Manipulation

The Q-tag Quad is activated by pressing the START-button for more than 2 seconds. To avoid manipulation this activation process cannot be reversed. If a device has been started by mistake it must be replaced.

Liability

The manufacturer shall not be held liable:

- If the device was used beyond the manufacturer's given limitations.
- For any claims due to the improper storage and use of the device.
- For any problems with the temperature controlling and / or cooling unit.
- For the bad quality of any monitored goods.
- For incorrect readings if the device was used beyond its expiry date.

Battery

The Q-tag Quad contains a CR Lithium battery. Please pay strict attention to the following points:

- The housing of the Q-tag Quad must never be opened nor destroyed.
- Do not expose the Q-tag Quad to temperatures above the allowed range (fire, oven, microwaves, etc.). It may cause injuries.
- Always keep the Q-tag Quad out of the reach of children.
- The battery complies with IATA DGR Packaging Instruction 970 Section II and is therefore not considered dangerous good.
- Dispose or recycle the Q-tag Quad in accordance with the WEEE 2012/19/EU guidelines or your local regulations. The device may also be returned to the manufacturer for proper recycling.
- The end of the battery life is indicated by the expiry date of the device. Accuracy and proper function of the device cannot be assured beyond this date.

Useful Life

The devices can be used up to 5 years after production date (expiry date printed on label) on the condition that:

- The button is not pressed for very long time, e.g. if jammed between the goods in a shipment.
- Storage and operation of the device remain within the recommendations of the manufacturer; especially very low temperatures shall be avoided.

Attention

The Q-tag Quad monitors temperature exposure and not product quality. Its purpose is to signal if product quality evaluation or testing is required.

Regulatory Certification

