




User Guide Q-tag[®] Quad

Table of Contents

Table of Contents	2
Document Purpose	3
Standard Version and Version Start	4
Alarm Explanation	5
Operating Instructions	6
State of Delivery / Sleep Mode.....	6
Activation of the Q-tag Quad	6
Start Delay Time (Optional)	7
Temperature Recording.....	7
Placing the Q-tag Quad	7
Display Indication During Temperature Recording.....	8
End of Temperature Recording / Stop Mode (only for standard version).....	9
Explanation of Terms	10
Sleep Mode.....	10
Start delay time (optional)	10
Expiry Code Explanation	11
Important Information	12
Activation / Manipulation	12
Liability.....	12
Battery	12
Useful Life.....	13
Attention.....	13
Regulatory Certification	13

Document Purpose

This document provides detailed information about the Q-tag® Quad.

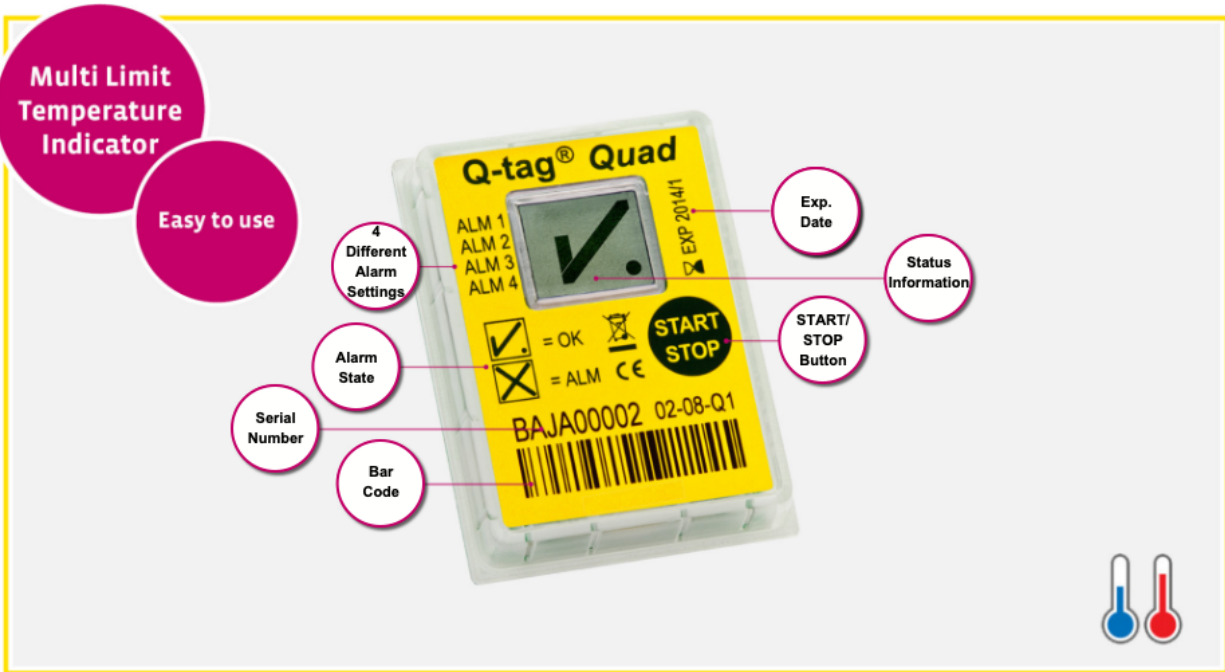

Q-tag® Quad: As Simple as Life Should Be

Internationally recognized symbols like the ok and the alarm symbol show the alarm state clearly. The Q-tag Quad is a highly accurate electronic temperature monitor. It is 100% calibrated and has a measuring accuracy of $\pm 0.5^{\circ}\text{C}$. The temperature measurements are made every minute over the entire monitoring time. Swiss quality in a compact format!

Up to 4 different alarm settings can be programmed for temperatures between -25°C to $+50^{\circ}\text{C}$. Alarms are individually set to meet customer requirements. Take control!

- User friendly, reliable and as accurate as a Swiss watch
- Individual alarms programmed to customer specifications
- Immediate and easy decision-making at a glance, thanks to a simple OK/alarm display

View [Technical Specification](#)

Standard Version and Version Start


Standard Version (Start and Stop)	 A yellow Q-tag Quad device with a small LCD screen displaying a large checkmark. The screen is flanked by four alarm indicators labeled ALM 1, ALM 2, ALM 3, and ALM 4. Below the screen, there are two checkboxes: the first is checked and labeled "= OK", and the second is unchecked and labeled "= ALM". To the right of these checkboxes is a "START STOP" button. At the bottom, the device shows the ID "BAJA00002 02-08-Q1", a barcode, and the website "www.q-tag.ch".
Version Start	 A yellow Q-tag Quad device, identical in design to the one above, but with a different screen display. The screen shows a large checkmark with a small "V" in the top right corner. The rest of the device, including the alarm indicators, checkboxes, buttons, and bottom text, is identical to the Standard Version.

Alarm Explanation

ALM 1		Single-event alarm “high”
ALM 2		Cumulative alarm “high”
ALM 3		Cumulative alarm “low” or “high”
ALM 4		Single-event alarm “low”

Operating Instructions

State of Delivery / Sleep Mode

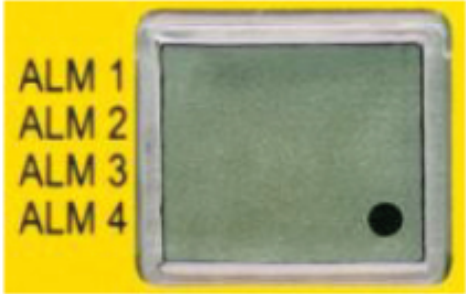 The image shows the Q-tag Quad device with a yellow background. On the left, there are four labels: ALM 1, ALM 2, ALM 3, and ALM 4. The device itself is a small, square, greenish-grey unit with a black dot (the running indicator) visible on its display.	Q-tag Quad is shipped in its so-called “Sleep Mode”. This will be observed by the constantly flashing dot (running indicator) on the display. In sleep mode, no data will be recorded.
---	--

Activation of the Q-tag Quad

Please always verify the expiry date prior to using any device (see [Expiry Code Explanation](#))

 The image shows the Q-tag Quad device with a yellow background. A hand is pressing the 'START' button. The device has a small screen showing a black dot. Below the screen, there are checkboxes for 'OK' and 'ALM', and a 'CE' mark. The device ID 'BAJA00002' and expiry date '02-08-01' are visible.	The device is activated by pressing the START- button for at least 2 seconds.
 The image shows the Q-tag Quad device with a yellow background. The screen now shows a large checkmark (✓) and a flashing dot. The 'START' button is now labeled 'STOP'. The device ID 'BAJA00002' and expiry date '02-08-01' are visible.	The active recording is shown by the ✓ (OK symbol) and the flashing dot on the display.

Note (only for standard Version): Prior to start make sure that the device is not yet activated, otherwise it will stop. To avoid accidental deactivation of the device, the stop function is locked for about 1 minute after the activation.

Start Delay Time (Optional)

If a start delay time has been programmed, it will be activated the moment you press the START-button for at least 2 seconds. The start delay time is not visible. Temperature recording will only start after completion of the start delay time.

To avoid accidental deactivation of the device, the stop function is locked during the start delay time.

Temperature Recording

Placing the Q-tag Quad

The activated monitor must be placed immediately in its predetermined location. It is recommended to place the device as close to the supervised goods as possible. This is an important prerequisite to ensure the temperatures observed by the device are as close to the product temperature as possible.

Precondition the device for 30 minutes to reach the target temperature before use, especially if no start delay is set. This helps prevent inaccurate readings at start-up.

Display Indication During Temperature Recording

Display examples of temperature recording:

 The image shows a yellow Q-tag Quad label. On the left, there are four alarm indicators labeled ALM 1, ALM 2, ALM 3, and ALM 4. In the center is a square display area showing a large black checkmark (✓). To the right of the display is an expiration date 'EXP 2014/1' with a clock icon. At the bottom left, there is a legend showing a checkmark in a box followed by '= OK'. At the bottom right, there is a 'START' button with a clock icon.	OK Display An ✓ (OK symbol) is indicated during normal operation as long as no alarms have been recorded. The monitored goods have not been exposed to temperature and time conditions outside the pre-set alarm parameters
 The image shows a yellow Q-tag Quad label, similar to the one above. The central square display area now shows a large black 'X' instead of a checkmark. To the left of the 'X', there are four small black arrows pointing outwards from the center of the display. The rest of the label, including the ALM indicators, expiration date, legend, and START button, remains the same.	ALARM Display The ✓ (OK symbol) will be replaced by an ✕ (ALARM symbol) as soon as any alarm has been triggered. Additional arrows are shown in the left display area to indicate which limit has been violated. The monitored goods have been exposed to temperature and time conditions outside the pre-set alarm parameters. The ALARM indication cannot be cancelled nor reset.

End of Temperature Recording / Stop Mode (only for standard version)



The Q-tag Quad may be stopped if the recording shall be finished, e.g. if a shipment has reached its final destination.

To do so, the STOP-button shall be pressed for at least 2 seconds. The running indicator disappears. The ✓ (OK symbol) or ✕ (ALARM symbol) and alarm flags remain stable for at least 3 months.

Explanation of Terms

Sleep Mode

This is the state of delivery of the device. It is the lowest current consumption state of the Q-tag Quad. The device is not activated, and no data recording is made.

Start delay time (optional)

The start delay is an optional functionality. If a start delay has been factory preset, the Q-tag Quad starts recording the temperature after the completion of the start delay time.

Expiry Code Explanation

Sample: EXP 2017-02

Means that the expiry date of the Q-tag Quad is February 2017

Important Information

Activation / Manipulation

The Q-tag Quad is activated by pressing the START-button for more than 2 seconds. To avoid manipulation this activation process cannot be reversed. If a device has been started by mistake it must be replaced.

Liability

The manufacturer shall not be held liable:

- If the device was used beyond the manufacturer's given limitations.
- For any claims due to the improper storage and use of the device.
- For any problems with the temperature controlling and / or cooling unit.
- For the bad quality of any monitored goods.
- For incorrect readings if the device was used beyond its expiry date.

Battery

The Q-tag Quad contains a CR Lithium battery. Please pay strict attention to the following points:

- The housing of the Q-tag Quad must never be opened nor destroyed.
- Do not expose the Q-tag Quad to temperatures above the allowed range (fire, oven, microwaves, etc.). It may cause injuries.
- Always keep the Q-tag Quad out of the reach of children.
- The battery complies with IATA DGR Packaging Instruction 970 Section II and is therefore not considered dangerous good.
- Dispose or recycle the Q-tag Quad in accordance with the WEEE 2012/19/EU guidelines or your local regulations. The device may also be returned to the manufacturer for proper recycling.
- The end of the battery life is indicated by the expiry date of the device. Accuracy and proper function of the device cannot be assured beyond this date.

Useful Life

The devices can be used up to 5 years after production date (expiry date printed on label) on the condition that:

- The button is not pressed for very long time, e.g. if jammed between the goods in a shipment.
- Storage and operation of the device remain within the recommendations of the manufacturer; especially very low temperatures shall be avoided.

Attention

The Q-tag Quad monitors temperature exposure and not product quality. Its purpose is to signal if product quality evaluation or testing is required.

Regulatory Certification

