



FlashLink®

型号 22392-5X、22493-5X、22368-5X

RTL 实时多用途数据记录仪



按钮功能

- 1. LED指示灯
- 2. 电源按钮（启动/停止）
- 3. 设备 ID、生产日期、
型号
- 4. 微型USB端口
- 5. 液晶显示窗



给电池充电

将 Multiuse RTL Data 充满电 4 小时，直到每次使用前，电池电量图标都会显示记录器。之上激活后，它将运行15天。

- 红色 LED 指示灯持续亮起
充电时
- 当电池充满时
充电完毕后，蓝色 LED 灯将保持亮起
点亮
- 指示电池电量低
在液晶屏上

当电池电量耗尽时，


已满且红色 LED 熄灭。



将充电线插入 micro USB
设备底部的端口和 USB
连接至 5V 2.4A USB 充电器。

LCD Display Indicators

1. Signal
2. 4G Tag
3. Statistic Type
4. Charging Icon
5. Battery Icon
6. Start Delay
7. Unit C or F
8. Humidity
9. Decimal Point
10. Colon
11. Measured Value
12. Recording

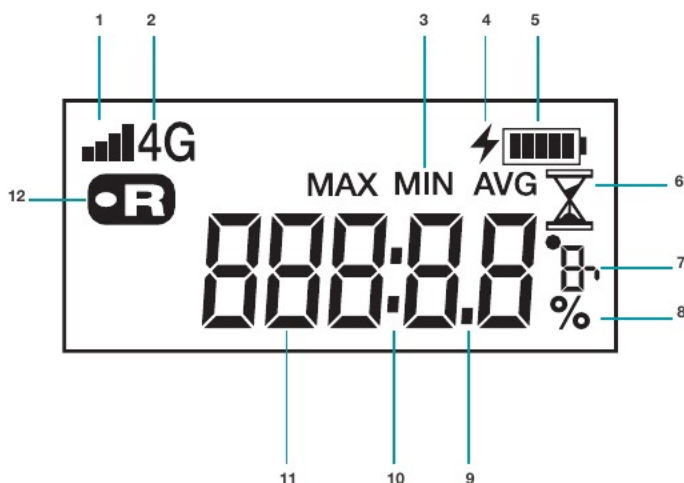


Cloud Service Contact

Go to flashtakrtl.com and sign in using the username and password provided to you by DeltaTrak. If you do not have one, please contact

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

设置新货件

1. 在仪表板中，单击左上角的“新货件”按钮
活动发货面板。

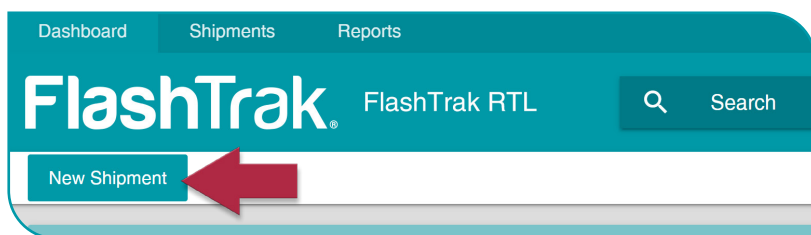

2. 选择设备 ID，然后选择您想要的设备行程编号
激活。货件 ID 可供您输入个人参考信息。
此时，您可以从下拉列表中选择托运人或
单击“新建发件人”以创建一个新发件人。从下拉列表选择一个接收器
下拉列表或创建一个新列表。分配适当的产品类型和
单击“保存”按钮。

The image shows the 'New Shipment' form in the FlashTrak system. The form has a blue header with the title 'New Shipment' and a close button. Below the header are several input fields and dropdown menus. The first row has 'Device ID' (with a dropdown arrow) and 'Shipment ID'. The second row has 'Shipper' (with a dropdown arrow) and 'Receiver' (with a dropdown arrow). Below 'Shipper' is a link 'New Shipper Carrier'. Below 'Receiver' is a link 'New Receiver'. The third row has a dropdown arrow, 'Airport' (with a dropdown arrow), 'Flight Hours' (with a dropdown arrow), and another dropdown arrow. Below this is a link 'New Carrier'. The fourth row has 'Expected Arrival Time', 'Activation Delay', and 'Time' (with a dropdown arrow). Below these fields is a tabbed interface with tabs for 'Product Alerts', 'Location Alerts', 'Attachments', 'Share List', and 'Additional Information'. The 'Product Alerts' tab is selected. Below the tabs is a link 'Select All / Deselect All'. Below this is a list of checkboxes and links:

- ☐ ACW-45 [view](#)
- ☐ ACW-70 [view](#)
- ☒ Alarm 2 [view](#)
- ☐ FTW-45 [view](#)
- ☐ FTW-70 [view](#)

At the bottom of the form are three buttons: 'Upload', 'Cancel', and 'Save'.

Activation

For the best experience, the device should be used with the

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

real time monitoring and alerting capabilities. For more information,

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

FlashLink RTL Real-Time Data Loggers are intended to be used with

EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

1. Setting

Alarm thresholds can be changed via the web app. The **flashtrakrtl.com** web portal enables users to:

- Change the temperature thresholds
- Add alarm notification personnel
- Share shipment data with non registered users.
- Set location notification
- Set up automatic flight mode

The screenshot shows a web application window titled "Edit Shipment". It contains several input fields and buttons. At the top right, there is a "Complete" button. Below it, there are dropdown menus for "Carrier" (set to DeltaTrak Pleasanton) and "Location" (set to Radar Nation). There are also fields for "Departure Time" (10/30/2020) and "Expected Arrival Time" (10/30/2020). At the bottom, there is a "Product Alerts" section with a checkbox for "Ambient" and a "Save" button.

2. Start

Press and hold the **START/POWER** button until **START** is displayed on the LCD screen. If no LCD is present then a blue LED will flash. The device is now active.

(Use the default alarm thresholds or change the alarm thresholds via Deltatrak web app **flashtrakrtl.com**).



3. 检查数据

每 5 分钟记录一次数据，并上传到云服务每15分钟一次，只要有蜂窝连接。当没有蜂窝网络连接时，数据记录在内存中。当蜂窝重新建立连接后，RTL 记录器将上传自上次上传以来存储的所有数据点。运行过程中可随时从 LCD 上查看数据记录期。按数据按钮显示：



4. 停止记录器

- 按住 STOP/POWER 按钮，直到 REC 不再出现。显示在屏幕上。如果没有 LCD，LED 将呈红色闪烁和蓝色。松开停止按钮。PDF 将出现在屏幕上。在此时记录器已停止记录。按开始键按钮以验证录制图标不再可见。
- 在 flashttrakrtl.com 网站上，单击完成编辑货件窗口上的按钮。（如果记录器打开发货完成后会自动创建下一个间隔的新发货）

Edit Shipment

Order # 20204001.3 Trip Status Active **Complete**

Shipper DeltaTrak Pleasanton Receiver Raider Nation

Carrier Airport Flight Hours

Departure Time 10/30/2020 Expected Arrival Time 10/30/2020


Product Alerts Location Alerts Attachments Share List Additional Information

☒ Ambient

Cancel Save

5. 报告

- 从记录器下载：当行程记录停止时，设备将自动生成 PDF 报告。使用 USB 电缆连接至 PC。位置数据未记录在记录器内存中，因此不会显示关于这份报告。
- 从网络应用程序：整组数据将备份在 flashtrakrtl.com 上的帐户。登录账户，点击设备ID，选择数据分析。包含基于三角测量的位置数据来自蜂窝塔位置。温度和湿度与数据上传到 Web 应用程序时的位置。

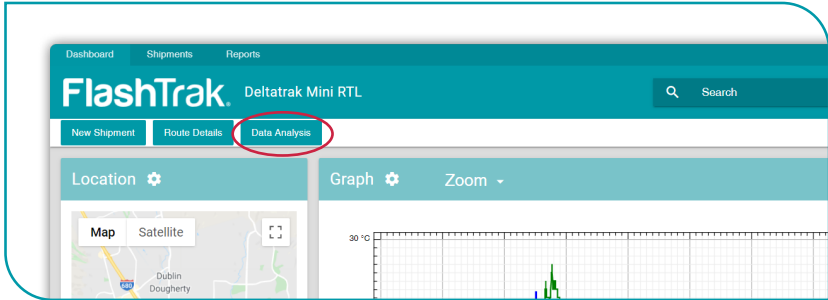

故障排除

使用前请仔细阅读以下注意事项：

- 如果设备未将数据上传到网络应用程序，请确认设备工作正常或检查设备是否处于飞行模式。
- 确认设备在测量范围内工作。
- 请勿拆卸设备。
- 使设备远离火源。
- 使设备远离液体。



DeltaTrak Corporate

- 📍 P.O. Box 398 Pleasanton CA 94566
- ☎️ EO: sales@eofirm.com | www.eofirm.com | 0755-84200058
- 💻 EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

DTI Mexico International

- 📍 Guadalajara, Mexico
- ☎️ EO: sales@eofirm.com | www.eofirm.com | 0755-84200058
- 💻 EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

DTI South America SA

- 📍 Santiago, Chile
- ☎️ EO: sales@eofirm.com | www.eofirm.com | 0755-84200058
- 💻 EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

DTI China Limited

- 📍 Shenzhen China
- ☎️ EO: sales@eofirm.com | www.eofirm.com | 0755-84200058
2831-2884 | 8923-2118
- 💻 EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

DTI Europe bvba

- 📍 Antwerp Belgium
- ☎️ EO: sales@eofirm.com | www.eofirm.com | 0755-84200058
- 💻 EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

DTI Japan Limited

- 📍 Osaka, Japan
- ☎️ EO: sales@eofirm.com | www.eofirm.com | 0755-84200058
- 💻 EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

DTI Asia Pacific

- 📍 NT, Hong Kong
- ☎️ EO: sales@eofirm.com | www.eofirm.com | 0755-84200058
- 💻 EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

DTI South Pacific

- 📍 Auckland, New Zealand
- ☎️ EO: sales@eofirm.com | www.eofirm.com | 0755-84200058
- 💻 EO: sales@eofirm.com | www.eofirm.com | 0755-84200058

DTI South Africa